



POWER TO LIFT

# HMF 1120K-RCS

The HMF 1120K-RCS is a reliable and wear-resistant crane for fast and precise handling.



## Main benefits

- Compact design
- Radio remote control system for total freedom
- Reliable and sturdy

## A fast and precise crane

The HMF 1120K-RCS is fitted with a dual Power Plus link arm system and an HDL-d speed adaptation system, which provide a very fast and precise handling of your crane.


The crane moreover has a high lifting capacity at long reach, in high positions, and close to the column. The low tare weight and reduced space requirements of the crane provide a good lift-to-weight ratio as well as full utilisation of the truck body.

PERFORMANCE	1120-K1	1120-K2	1120-K3	1120-K4	1120-K5
Load Moment (tm)	10,2	9,9	9,7	9,4	9,2
Hydraulic reach (m)	5,5	7,5	9,7	11,8	14
Weight excl. stabilizers (Kg)	1000	1105	1205	1295	1375
Weight of stabilizers, standard (Kg)	160	160	160	160	160
Lift-to-weight ratio	8,7	7,8	7,1	6,4	6
Slewing Angle (°)	420	420	420	420	420
Slewing torque (kgm)	1325	1325	1325	1325	1325
Working pressure (bar)	345	345	345	345	345
GEOMETRY					
Height above mounting surface (mm)	2135	2135	2135	2135	2135
Width, folded, standard (mm)	2350	2350	2350	2350	2350
Length of crane, no extra valves (mm)	747	747	747	747	747


# Lifting Capacity




1120-K1-RCS

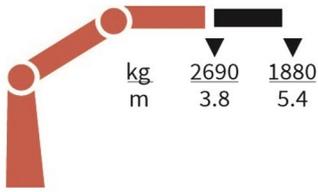


1120-K2-RCS

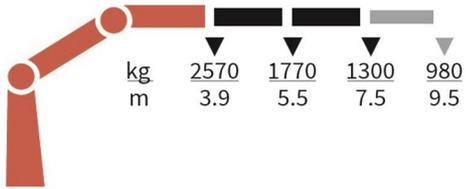


1120-K3-RCS

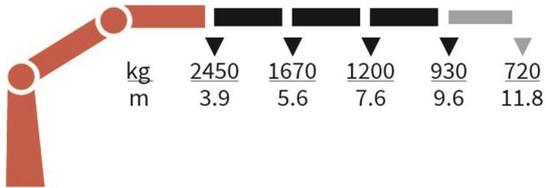

1120-K4-RCS

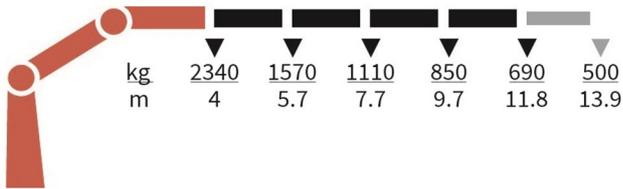

1120-K5-RCS

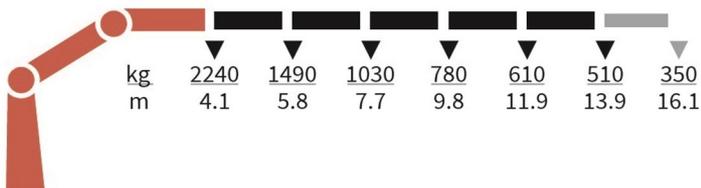

## Basics

HMF 1120K-RCS

Electronic speed adaptation system, HDL-d/HD5
Progressive crane control - PCC
Priority flow control - PFC
Dual power plus link arm system
Proportional control valve PVG 32
Internal hose routing
Environmentally friendly quality coating - EQC

## Options

<b>Options</b>
<b>Control stations</b>
High stand RC
Top seat RC
Heated seat
<b>Control systems</b>
Radio remote control Maxi - RC-MAX
Radio remote control Mini - RC-MIN
<b>Electrical options</b>
Spotlight
Voltage
<b>Extra valves</b>
Extra valves in hose guides
Extra valves in hose reels, internally led
Multi-coupling
<b>Hydraulic hoist</b>
Hydraulic hoist 1500
2-part snatch block
<b>Hydraulics</b>
4 manually controlled available stabilizer functions
2 manually controlled available stabilizer functions
1-4 available radio remote-controlled functions
Biodegradable oil
Ball valve for tank
Oil cooler, medium
Oil tank 55 l mounted on the crane
Radio remote control of stabilizer beams and stabilizer legs on crane
<b>Mechanical options</b>
Manual extension
Hook for manual extension
Crane orientation
Mounting bolt kit
Fittings for mounting bolt kits
Mechanical slew limitation
<b>Stability and safety</b>
Electronic vehicle stability - EVS
Cylinder limitation - CYL
Cylinder and beam limitation - CYBEL
2-section Cylinder and beam limitation - 2CYBEL
2-stage load moment limitation
Preparation for alternative stability system
Stabilizer duty control

Alarm flash on stabilizer legs
Calibration of vehicle stability system during crane operation
Light tower
Temperature monitoring
High stand safety system - basic
High stand safety system - envelope
High stand safety system - quadrant
Quadrant operator protection system
Beam and height warning - BEHEW
Beam and park warning
Stabilizer leg warning
<b>Stabilizer beams and legs</b>
Manual swing-up stabilizer legs with gas spring
Manual swing-up stabilizer legs
Fixed vertical stabilizer legs
Footplate with ball joint
Footplate extended
Hydraulic stabilizer beams 4.2 m - 5.1 m
Fixed vertical stabilizer legs, short
Manual stabilizer beams 4.2 m - 5.1 m
<b>Colours</b>
RAL colors